



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2013-07-31

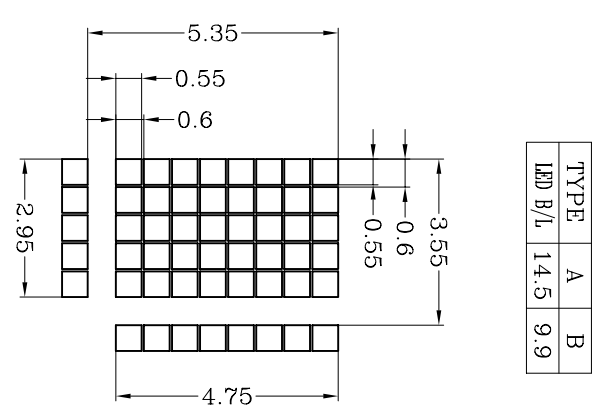

DOTS DETAIL  
SCALE 6:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

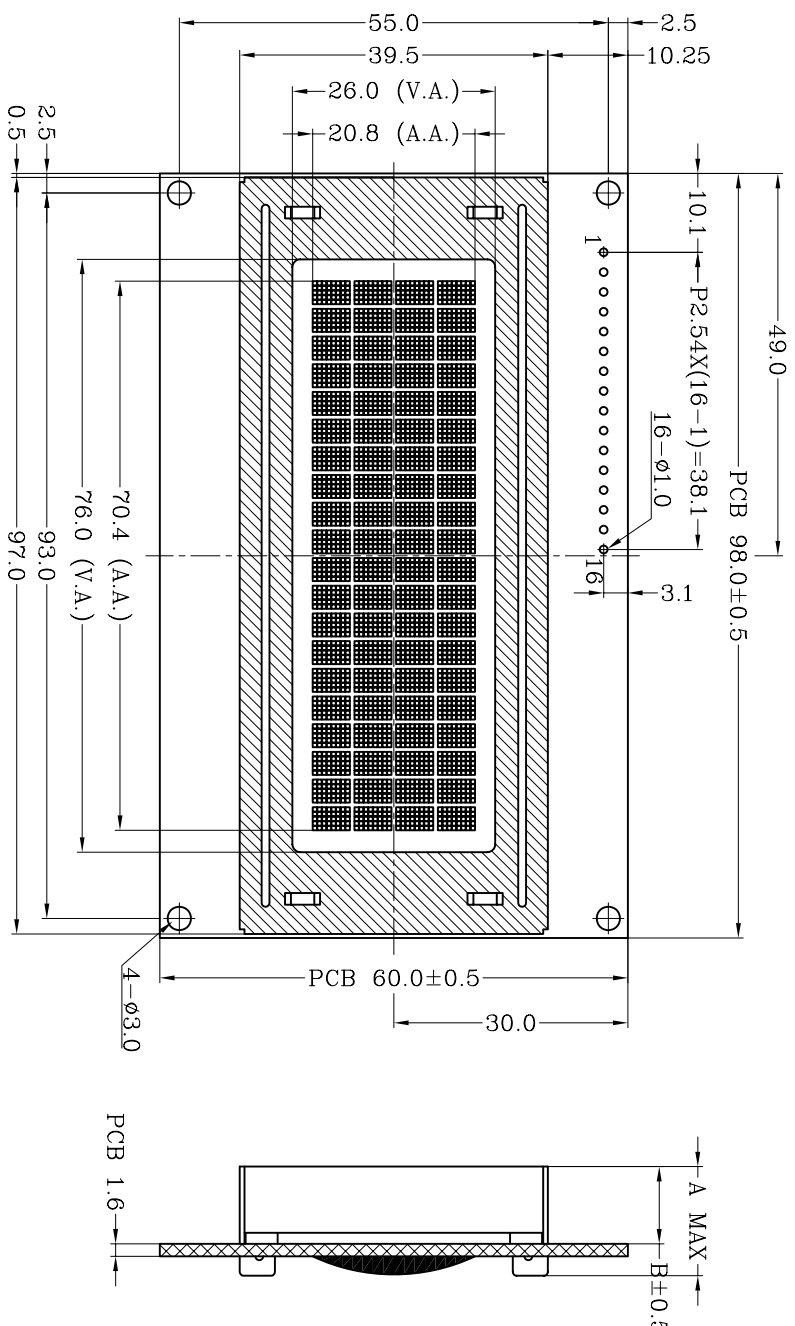

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSLECTIVE/POSITIVELY-G/ANTI UV
2. LCD DRIVING VOLTAGE: 4.7V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6.0CLOCK
5. OPERATING TEMP: -20°C~+70°C
6. STORAGE TEMP: -30°C~+80°C
7. DRIVE MODE: 1/16 DUTY 1/5 BIAS
8. BACKLIGHT: YELLOW GREEN/SIDE BACKLIGHT/5.0V
9. OTHER:

NOTE:

MECHANICAL TOL.±0.2 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT  
SHEET: 1 OF 1  
PROJECTION  
UNIT: mm  
MODEL: TC2004A-01A  
SERIAL NUMBER: JULY0506

TINSHARP INDUSTRIAL CO.,LTD.  
TINSHARP

APP:	CHK:	DWN:
DATE:	DATE:	DATE: